


CATTLE DESIGN

2 - WIRE PERMANENT

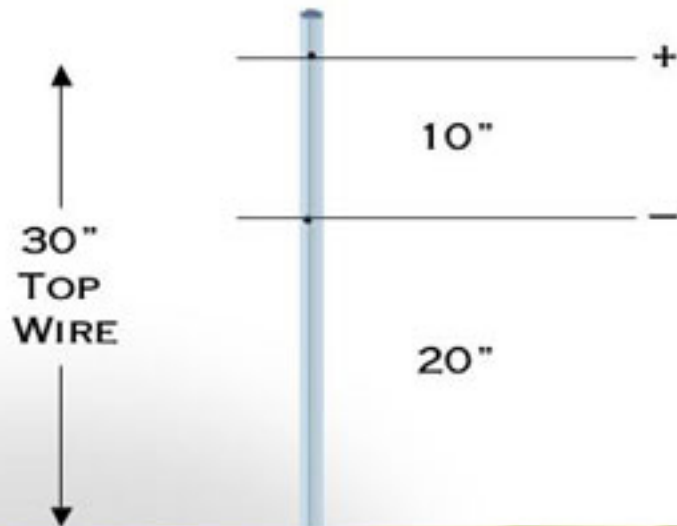


SPECIFICATIONS:

# WIRES:	2
FENCE HEIGHT:	30"
LINE POST:	SOLID ROD FIBERGLASS 48" 2-HOLE SR482
SPACING:	50 FT.
BRACING:	BEDLOG
POLARITY:	HOT / GROUND
WIRE TENSION:	MEDIUM (150 LBS.)
APPLICATIONS:	CROSS FENCE FOR: STOCKER/YEARLING MATURE CATTLE LARGER CALVES

CATTLE DESIGN

3 - WIRE PERMANENT

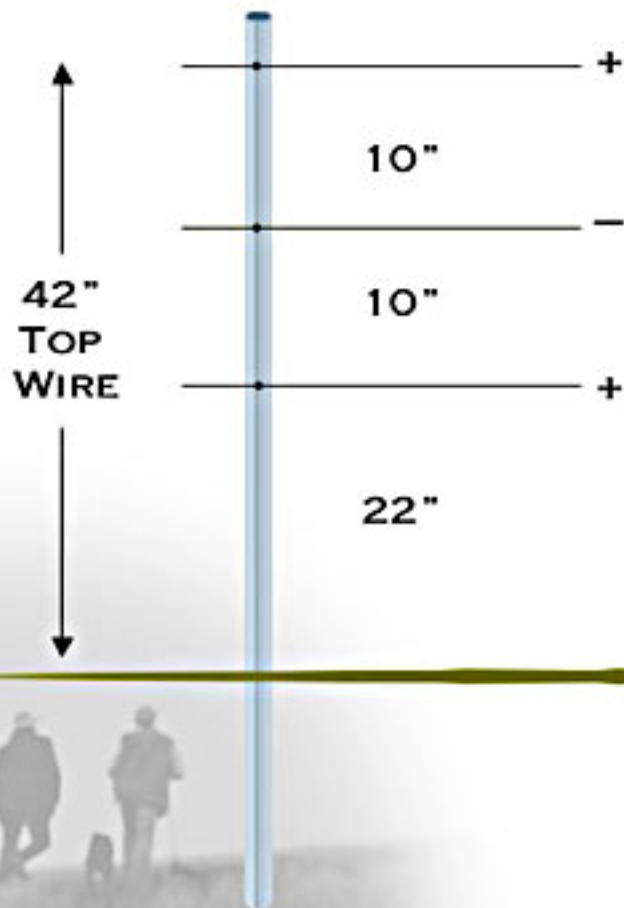


SPECIFICATIONS:

# WIRES:	3
FENCE HEIGHT:	42"
LINE POST:	SOLID ROD FIBERGLASS 60" 3-HOLE SR603
SPACING:	50 FT.
BRACING:	'H' BRACE OR BEDLOG
POLARITY:	HOT / GROUND
WIRE TENSION:	MEDIUM (150 LBS.)
APPLICATIONS:	COW/CALF BISON CROSS FENCE HORSE

CATTLE DESIGN

TIE-DOWN / ANCHOR

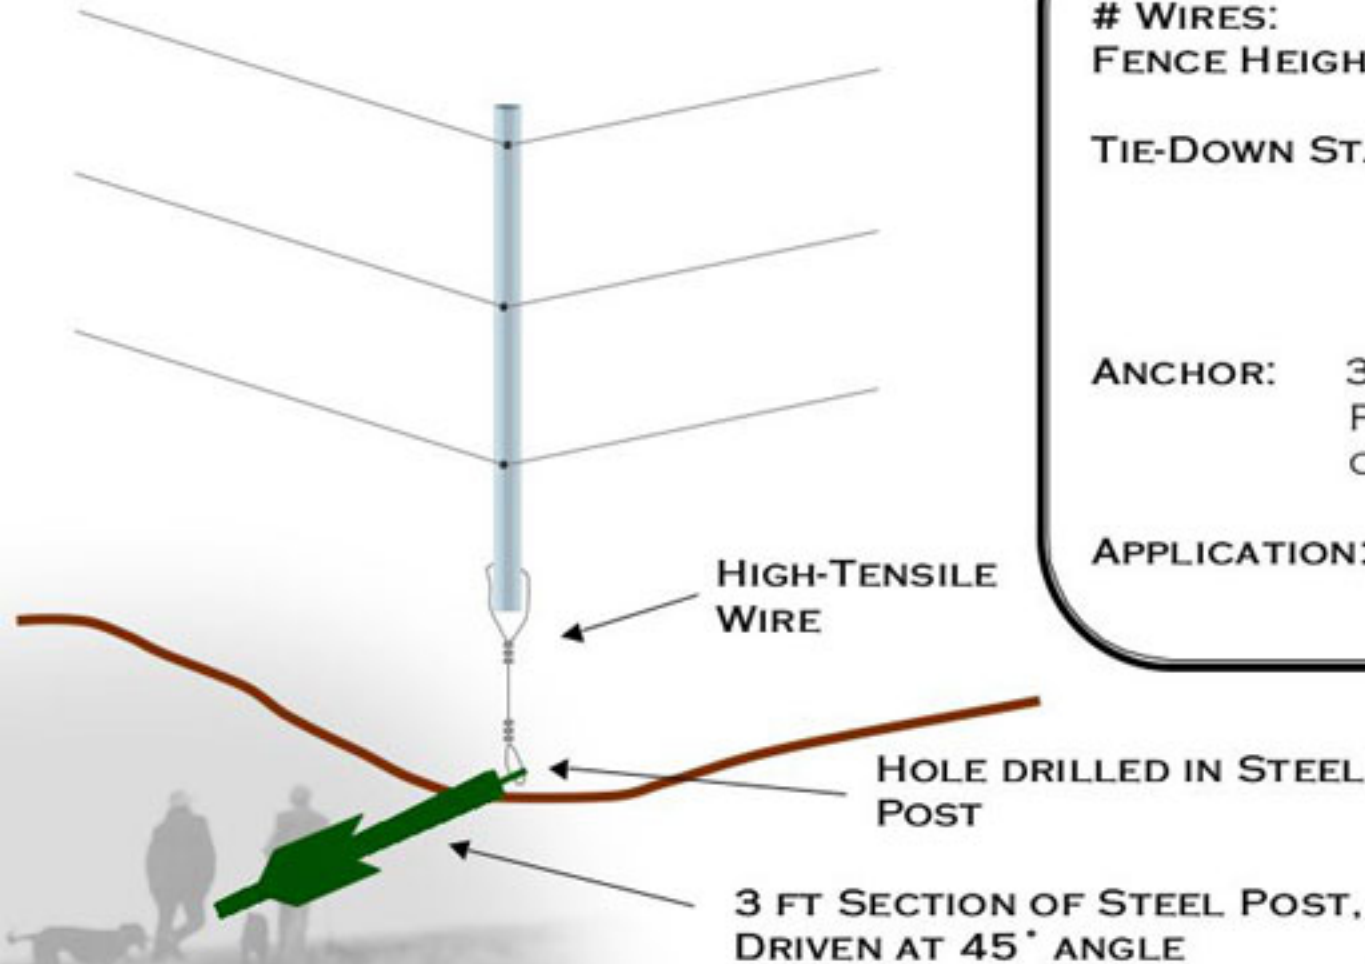

SPECIFICATIONS:

WIRES: 2-5
FENCE HEIGHT: 30" - 48"

TIE-DOWN STAY: SOLID ROD FIBERGLASS
2-WIRE: SR173
3-WIRE: SR314
5-WIRE: SR405

ANCHOR: 3 FT. SECTION OF STEEL
POST, WITH HOLE DRILLED
OR BLOWN IN ONE END.

APPLICATION: TO ANCHOR FENCE
DOWN IN LOW SPOTS.